

Helix, recessed low energy compact fluorescent downlighter. Complete with highly polished reflector and removable polycarbonate prismatic lens. Ideal for receptions, corridors, staircases, lounges etc.


Features:

- Low energy compact fluorescent light source
- High Frequency (HF) control gear ●●
- Horizontal lamp position
- Removable lens, offers two installation options
- Integral control gear
- Fully recessed ceiling mounting (1 – 30mm thickness)
- Easy to install via spring release ceiling clips

Options:


- Integral 3hr. maintained emergency version available (E3) ●●
- High Frequency Analogue Dimming (AD) version available ●●●
Suffix ordering code /AD (e.g. IDRH 2/113/AD)
- High Frequency Digital Dimming version available on request ●●●

Material:

- Body: polycarbonate
- Reflector: aluminium
- Lens: polycarbonate

Finish:

- Body: white
- Reflector: polished
- Lens: prismatic

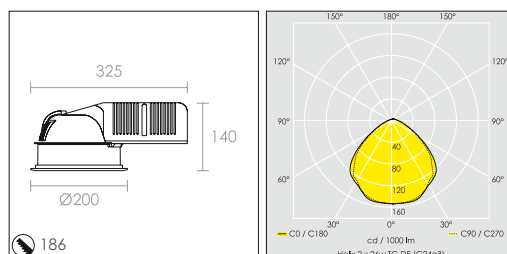

186

Helix

Lamp type (Not supplied)	Ordering Code	
	High Frequency (HF)	Emergency (E3) (integral gear)
1 x 13w TC-DE (G24q1)	IDRH 2/113	E3-IDRH 2/113
1 x 18w TC-DE (G24q2)	IDRH 2/118	E3-IDRH 2/118
1 x 26w TC-DE (G24q3)	IDRH 2/126	E3-IDRH 2/126
2 x 13w TC-DE (G24q1)	IDRH 2/213	E3-IDRH 2/213
2 x 18w TC-DE (G24q3)	IDRH 2/218	E3-IDRH 2/218
2 x 26w TC-DE (G24q3)	IDRH 2/226	E3-IDRH 2/226



These luminaires are designed to comply with
 EN 60598-1 (BS 4533:101)
 Emergency EN 60598.2.22 (BS 4533:102.22)

