

Gladiator, IP65 enclosed surface mounting high frequency linear fluorescent luminaire. Features single or twin T5 high efficiency or high output lamp options, fitted with tamper resistant screws. Gladiator will withstand considerable physical attack. Ideal for car parks, schools, hospitals, subways etc.




**Features:**

- IP65 (dust tight & water jet proof)
- Single or twin T5 high efficiency (HE) or high output (HO) linear fluorescent light sources
- High Frequency (HF) control gear ●●
- Surface mounting
- Vandal resistant
- Tamper resistant screws
- Flame retardant prismatic lens
- Fixing centre besa box provision
- 2 x 20mm conduit entry for through wiring

**Options:**

- Integral 3hr. maintained emergency (E3) ●●
- Integral D-tect occupancy/light sensor (see data sheet M3/102) ●●●●
- Integral iLite function (see data sheet M3/102) ●●●●
- High Frequency Analogue Dimming (AD) version available ●●●  
Suffix ordering code /AD (e.g. FSGP 128/AD)
- High Frequency Digital Dimming version available on request ●●●

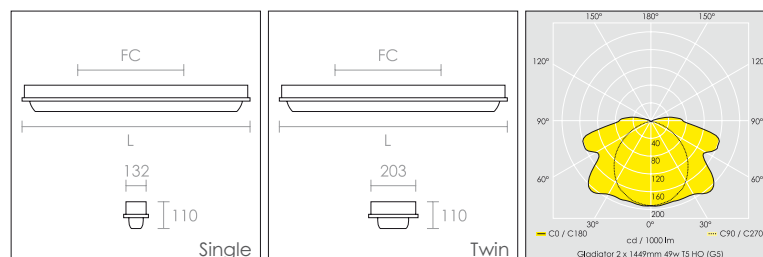

**Material:**

- Body: steel
- Lens: polycarbonate

**Finish:**

- Body: grey (textured)
- Lens: opal



These luminaires are designed to comply with EN 60598-1 (BS 4533:101) Emergency EN 60598.2.22 (BS 4533:102.22)



## Gladiator

Ordering Code

Lamp type (Not supplied)	Length (L)	Fixing centre (FC)	High frequency (HF)	Emergency (E3) (integral gear)
<b>Single</b>				
1 x 1149mm 28w T5 HE (G5)	1350	600	FSGP 128	E3-FSGP 128
1 x 1449mm 35w T5 HE (G5)	1650	600	FSGP 135	E3-FSGP 135
1 x 1149mm 54w T5 HO (G5)	1350	600	FSGP 154	E3-FSGP 154
1 x 1449mm 49w T5 HO (G5)	1650	600	FSGP 149	E3-FSGP 149
<b>Twin</b>				
2 x 1149mm 28w T5 HE (G5)	1350	600	FSGP 228	E3-FSGP 228
2 x 1449mm 35w T5 HE (G5)	1650	600	FSGP 235	E3-FSGP 235
2 x 1149mm 54w T5 HO (G5)	1350	600	FSGP 254	E3-FSGP 254
2 x 1449mm 49w T5 HO (G5)	1650	600	FSGP 249	E3-FSGP 249