


Contemporary Surface Ceiling Luminaires

Orbit Prismatic Courtesy Occupancy, contemporary low energy compact fluorescent wall/ceiling luminaire. The courtesy function, iLite (Intelligent Light) provides constantly dimmed illumination in areas that are temporarily unoccupied. Upon sensing a presence, the luminaire immediately activates to full illumination. When the controlled area becomes unoccupied, the low energy light source fades, offering the ultimate in comfort & security and maintaining sustainable energy efficiency. iLite fades over a time period of 3 seconds, finally resting at a user defined ambient light level of 10%, 25% or 50%. iLite is ideal for use in a host of applications including corridors, stairways & toilets etc.



Features:

- Integral iLite courtesy function (see page 2) ●●●●
- Low energy compact fluorescent light source
- High Frequency (HF) control gear ●●
- Wall or ceiling mounting
- Contemporary design
- Snap in locating polycarbonate lens
- Besa box provision
- Suitable for 20mm conduit entry for side wiring

Options:




- iLite courtesy with Integral D-TECT occupancy/light sensor Master (see page 2) ●●●●
- iLite courtesy with remote occupancy Slave (see page 2) ●●●●
- Attractive backlighting effect version available on request
- Integral 3hr. maintained emergency (E3) ●●
- Semi-recessing housing kit
- Opal lens version available (see data sheet F1/314)

Material:

- Body: polycarbonate
- Lens: polycarbonate

Finish:

- Body: white
- Bezel: white, chrome or polished brass
- Lens: prismatic



Orbit Prismatic Courtesy Occupancy

Lamp type (Not supplied)	Ordering Code		
	White	Chrome	Polished brass
Master			
1 x 28w TC-DD (GR10q)	SCOP 4/28WH/L1M	SCOP 4/28CH/L1M	SCOP 4/28PB/L1M
1 x 28w TC-DD (GR10q)	E3-SCOP 4/28WH/L1M	E3-SCOP 4/28CH/L1M	E3-SCOP 4/28PB/L1M
1 x 38w TC-DD (GR10q)	SCOP 4/38WH/L1M	SCOP 4/38CH/L1M	SCOP 4/38PB/L1M
1 x 38w TC-DD (GR10q)	E3-SCOP 4/38WH/L1M	E3-SCOP 4/38CH/L1M	E3-SCOP 4/38PB/L1M
2 x 18w TC-DE (G24q2)	SCOP 4/218WH/L1M	SCOP 4/218CH/L1M	SCOP 4/218PB/L1M
2 x 18w TC-DE (G24q2)	E3-SCOP 4/218WH/L1M	E3-SCOP 4/218CH/L1M	E3-SCOP 4/218PB/L1M
Slave			
1 x 28w TC-DD (GR10q)	SCOP 4/28WH/L1	SCOP 4/28CH/L1	SCOP 4/28PB/L1
1 x 28w TC-DD (GR10q)	E3-SCOP 4/28WH/L1	E3-SCOP 4/28CH/L1	E3-SCOP 4/28PB/L1
1 x 38w TC-DD (GR10q)	SCOP 4/38WH/L1	SCOP 4/38CH/L1	SCOP 4/38PB/L1
1 x 38w TC-DD (GR10q)	E3-SCOP 4/38WH/L1	E3-SCOP 4/38CH/L1	E3-SCOP 4/38PB/L1
2 x 18w TC-DE (G24q2)	SCOP 4/218WH/L1	SCOP 4/218CH/L1	SCOP 4/218PB/L1
2 x 18w TC-DE (G24q2)	E3-SCOP 4/218WH/L1	E3-SCOP 4/218CH/L1	E3-SCOP 4/218PB/L1
Accessories	Ordering Code		
Semi-recessing housing kit	SCO SRK		



These luminaires are designed to comply with EN 60598-1 (BS 4533:101) Emergency EN 60598.2.22 (BS 4533:102.22)



Energy Saving Controls

The Ultimate Sustainable Energy Saving Device

iLite (Intelligent Light) Courtesy Function provides the versatile combination of sustainable energy efficiency with an added element of security and comfort. The iLite function provides constantly dimmed illumination, set to a preset level, in areas that are temporarily unoccupied.

Upon sensing a presence, the luminaire immediately provides 100% illumination. When the controlled area becomes unoccupied, the light fades over a time period of 3 seconds, finally resting at a user defined ambient light level of 10%, 25% or 50%.

The iLite luminaire is available in two versions, Master and Slave. The Master operates with an integral occupancy D-TECT sensor, and the Slave is designed for use in conjunction with either a Master unit or with a remote occupancy control.


The D-TECT integral occupancy/light sensor ensures areas are only illuminated at 100% when occupied, or daylight diminishes below the required level. D-TECT possesses all the features of a PIR occupancy/light sensor, but with additional advanced microwave technologies. D-TECT master luminaires are capable of controlling slave luminaires up to a maximum total load of 500VA.

Features:

- Unobtrusive, no external indication that the area is being controlled
- Illumination (lux) adjustment, ensures luminaire remains at the courtesy dimmed function during daylight hours
- Time adjustment (8 seconds – 30 minutes), optimizes energy saving in heavy or light traffic areas
- Sensitivity/range adjustment, prevents interference from unnatural movement.


Detection distances

Ceiling Mounting



The sensor will cover a floor area of approximately 8m in diameter at an installed height of 2.5m.

Wall mounting

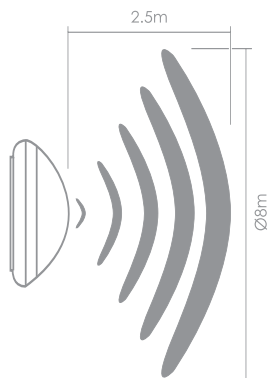


Please note the master luminaire(s) should not be positioned within 1m of ventilation equipment or fixed to a vibrating surface.

The adjustment dials are used to adjust the sensitivity/range, illumination (lux) and time.

Sensitivity/range adjustment
Areas in which microwave sensors are installed can sometimes be subjected to unwanted interference, therefore unnecessary switching on of the luminaire. The sensor can be adjusted to ignore such interference; depending on this setting, a reduced detection distance is possible.


Illumination (lux) adjustment (2 – 2000 lx)
The sensor can be adjusted to switch on the luminaire(s) at the chosen light level, ensuring the luminaire(s) only switch on when necessary.

Time adjustment
The illumination time period can be adjusted between 8 seconds – 30 minutes from the last detection of movement. Ideally heavy traffic areas should have a longer setting, e.g. corridors & staircases etc.



Courtesy Ambient Light Level
Simple DIP switch adjusts the courtesy ambient light level to 10%, 25% or 50% options.

Schematic wiring diagram

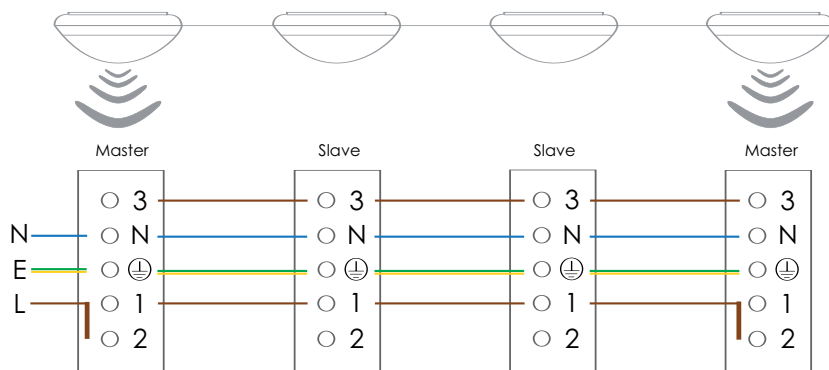

Voltage 220–240v / 50–60Hz | Capable of controlling slave luminaires (max 500VA)

Potential savings example

Luminaire type	Existing lighting system	Controlled lighting system (iLite)	
	Typical 1 x 28w low energy luminaire (Switchstart control gear (type B2))	Ilite & D-TECT 1 x 28w Master luminaire (High frequency iLite control gear (type A1))	Ilite 1 x 28w Slave luminaire (High frequency iLite control gear (type A1))
Quantity	200	100	100
Total luminaire power in Occupied function at 100% light (W)	36	29	29
Total luminaire power in Courtesy function at 10% light (W)	N/A	6.8	5.8
Hours of illumination per day in Occupied function at 100%	24	4	4
Hours of illumination per day in Courtesy function at 10%	N/A	20	20
Total lighting system power over 24 hours (W)	172800	25200	23200
Grand total (kWh per day)	172.80		48.40
Grand total (kWh per year)	63072		17666
Price per kWh	£0.10		£0.10
Annual energy cost (£)	£6307.20		£1766.66
Annual operating cost of existing system (£):			£6307.20
Annual operating cost of controlled system (iLite):			£1766.66
Energy saving (%):			71.9%
Energy saving (£):			£4540.54